

# Osprey® 210

Video Capture Card



## Built on the board that started it all

The Osprey 210 starts with the legendary quality and performance of the Osprey® 100 and adds on-board analog stereo audio inputs. It's an excellent choice for low-cost systems where one video input and one unbalanced audio input is sufficient.

**Video capture and streaming possibilities.** Like all Osprey cards, you can plug in additional Osprey 210 cards or mix and match with other Osprey cards whenever you need additional video and audio channels. It's perfect for budget-conscious customers who need reliable video and audio capture performance at an attractive price.

With the Osprey 210, you can monitor audio capture without affecting rich media delivery with enhanced sound capture at lower bit rates. Additionally, the Osprey 210 supports the most popular video and audio APIs.

**Optimize to meet your needs.** The Osprey 210 is compatible with SimulStream® which empowers you to deliver full-frame video to high-speed Internet users or smaller, lower-rate video to DSL and dial-up subscribers, as well as optimized video for several different mobile device standards – all while saving the same content to a storage device for post-processing and other Video on Demand (VOD) applications.

### Ideal Solution for:

- > Broadcasters
- > Enterprise
- > Government
- > OEM systems integrators

### Applications


- > Webcasting
- > Live streaming
- > Podcasting
- > Mobile TV
- > Video on Demand
- > Surveillance

### Key Attributes

- > Enables multiple Osprey cards per chassis
- > Includes BNC composite video input
- > Provides audio loop-back output via rear-panel headphone jack
- > Supports closed-caption extraction
- > Increases integration flexibility by allowing multiple cards to operate within a single PC
- > Captures full-frame video at 30 frames per second providing full standard-definition resolution for maximum quality
- > Drivers are available for Microsoft® Windows® XP, Server 2003, server 2008, Vista and Windows 7; check the ViewCast Web site for available drivers on the **Support** tab / **Software & Drivers**

## Osprey® 210

Video Capture Card

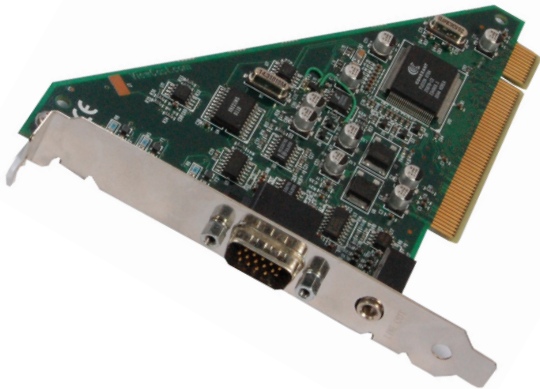

### Breakout Cable



### Driver Support:

- Microsoft® DirectShow® API

### Inputs:

#### Video:

One channel selectable input

- Composite (*BNC x 1*)
- S-Video (*mini-DIN*)

#### Audio:

- Unbalanced stereo (*RCA x 2*)
- Unbalanced (*3.5 mini phono*) stereo

### Outputs:

#### Audio:

- Unbalanced stereo line (*3.5 mm*)

### Video Format:

- NTSC/PAL

### Pre-Processing:

- Closed-caption extraction / rendering
- Logo/bitmap overlay
- Scaling, cropping, de-interlacing and inverse telecine
- Loss of video automatic test pattern generation with text overlay option

### Dimensions:

- Full-height / short-length board
- 5.08" L x 4.20" H  
(*12.90 cm L x 10.68 cm H*)
- 32-bit/5 Volt PCI™ card
- Full PCI Rev 2.1 compliance

### Hardware Warranty:

- 1 year limited hardware warranty

